

HEARING PROTECTION PROSIL™ REUSABLE EARPLUGS


PRODUCT DATA SHEET: EPSU | EPSC



PRODUCT CODE:
EPSU



PRODUCT CODE:
EPSC

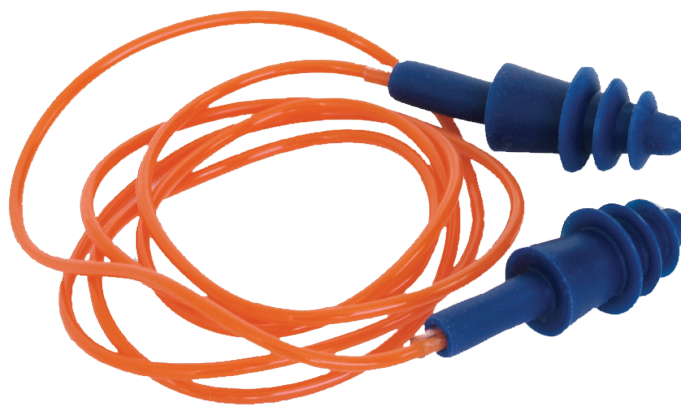

FEATURES AND BENEFITS

- Certified to AS/NZS 1270:2002 Acoustic Hearing Protectors - Class 3 SLC₈₀ 18dB.
- Hearing protection for noise levels to 100dB(A).
- Coloured blue for food safety.
- Reusable silicone earplugs.
- Comes in resealable plastic case.
- Cord allows earplugs to hang around neck when not in use.
- Sold individually.

AVAILABLE IN

PRODUCT CODE	UOM	MOQ	CTN QTY
EPSU	EACH	1	500
EPSC	EACH	1	500

MAINTENANCE

Before handling any earplugs, ensure hands are clean. Always check your earplugs and discard if damaged, worn or dirty. Silicone plugs can be washed if necessary. Single use ear plugs can cause health issues if used when dirty.

If kept clean and undamaged, silicone (reusable) ear plugs can be used many times over. Clean with mild soap/water and store in a case away from extreme heat and direct sunlight when not in use. On banded earplugs, clean and replace pads regularly as required.

APPLICATIONS

Agriculture, Construction, Fire Protection, Food Services, Forestry, Government, Emergency Services, Manufacturing, Medical, Military, Councils, Mining, Oil and Gas, Pharmaceutical, Steel and Metals, Transportation, Welding, Logistics and Transport, Automotive & Utilities.



COMFORT



HI-VIS



HYGIENIC



REUSABLE

PRODUCT DETAILS

Material:	Silicone
Length:	3.2cm
Diameter:	1.5cm
Cord Length:	7.4cm
Weight:	3.1g
Colour:	Blue Silicone Hi-Vis Orange Cord

TEST DATA

ATTENUATION TABLE (IN DECIBELS)							
Frequency Hz	125	250	500	1000	2000	4000	8000
Mean Attenuation	20.5	21.0	23.8	24.1	27.6	30.6	35.6
Standard Deviation	11.3	11.1	11.4	7.9	6.0	8.6	12.3
Mean-Minus-Standard Deviation Attenuations	9.2	9.9	12.4	16.2	21.6	22.0	23.3

SLC₈₀ Value is 18 (Class 3)

STANDARDS

CERTIFIED TO:
AS/NZS 1270:2002 Acoustic Hearing Protectors - Class 3 SLC₈₀ 18dB.

When selected, used & maintained as specified in AS/NZS 1269, this protector may be used in noise up to 100dB(A) assuming an 85dB(A) criterion. A lower criterion may require a higher protector class.



AS/NZS 1270:2002
SMKH2529

Available from



FROM

PARAMOUNT
SAFETY PRODUCTS